

### Specifications

| Models  | GS-2046       |         | GS-2646       |         | GS-3246       |         |
|---|---------------|---------|---------------|---------|---------------|---------|
| Measurements  | US            | Metric  | US            | Metric  | US            | Metric  |
| Working height maximum*   | 26 ft         | 7.9 m   | 32 ft         | 9.8 m   | 38 ft         | 11.6 m  |
|  Platform height maximum             | 20 ft         | 6.10 m  | 26 ft         | 7.92 m  | 32 ft         | 9.75 m  |
|  Platform height stowed              | 3 ft 4.8 in   | 1.04 m  | 3 ft 9.6 in   | 1.16 m  | 4 ft 2.75 in  | 1.29 m  |
|  Platform length - outside           | 7 ft 5 in     | 2.26 m  | 7 ft 5 in     | 2.26 m  | 7 ft 5 in     | 2.26 m  |
| extended  | 10 ft 5 in    | 3.18 m  | 10 ft 5 in    | 3.18 m  | 10 ft 5 in    | 3.18 m  |
| Slide-out platform extension deck   | 3 ft          | 0.91 m  | 3 ft          | 0.91 m  | 3 ft          | 0.91 m  |
|  Platform width - outside            | 3 ft 9.5 in   | 1.16 m  | 3 ft 9.5 in   | 1.16 m  | 3 ft 9.5 in   | 1.16 m  |
| Guardrail height  | —             | —       | 3 ft 7 in     | 1.09 m  | 3 ft 7 in     | 1.09 m  |
| Toeboard height   | 6 in          | 0.15 m  | 6 in          | 0.15 m  | 6 in          | 0.15 m  |
|  Height - stowed: folding guardrails | 7 ft          | 2.13 m  | 7 ft 5 in     | 2.26 m  | 7 ft 10 in    | 2.39 m  |
| rails folded  | 5 ft 1 in     | 1.55 m  | 5 ft 6 in     | 1.68 m  | 5 ft 11 in    | 1.80 m  |
|  Length - stowed                     | 8 ft          | 2.44 m  | 8 ft          | 2.44 m  | 8 ft          | 2.44 m  |
| extended  | 10 ft 10.5 in | 3.31 m  | 10 ft 10.5 in | 3.31 m  | 10 ft 10.5 in | 3.31 m  |
|  Width                               | 3 ft 10 in    | 1.16 m  | 3 ft 10 in    | 1.16 m  | 3 ft 10 in    | 1.16 m  |
|  Wheelbase                           | 6 ft 1 in     | 1.85 m  | 6 ft 1 in     | 1.85 m  | 6 ft 1 in     | 1.85 m  |
|  Ground clearance - center           | 3.76 in       | 95 mm   | 3.76 in       | 95 mm   | 3.76 in       | 95 mm   |
|  - with pothole guards deployed      | 0.75 in       | 0.019 m | 0.75 in       | 0.019 m | 0.75 in       | 0.019 m |

### Productivity

|                                |                  |             |                  |             |                  |             |
|--------------------------------|------------------|-------------|------------------|-------------|------------------|-------------|
| Maximum platform occupancy**   | 4                | 4           | 3                | 3           | 2                | 2           |
| Lift capacity                  | 1,200 lbs        | 544 kg      | 1,000 lbs        | 454 kg      | 700 lbs          | 318 kg      |
| Lift capacity - extension deck | 250 lbs          | 113 kg      | 250 lbs          | 113 kg      | 250 lbs          | 113 kg      |
| Drive height                   | full height      |             | full height      |             | full height      |             |
| Drive speed - stowed           | 2.2 mph          | 3.5 km/h    | 2.2 mph          | 3.5 km/h    | 2.2 mph          | 3.5 km/h    |
| Drive speed - raised           | 0.5 mph          | 0.8 km/h    | 0.5 mph          | 0.8 km/h    | 0.5 mph          | 0.8 km/h    |
| Gradeability - stowed          | ***              | 30%         |                  | 30%         |                  | 25%         |
| Turning radius - inside        | zero             | zero        | zero             | zero        | zero             | zero        |
| Turning radius - outside       | 7 ft 6 in        | 2.29 m      | 7 ft 6 in        | 2.29 m      | 7 ft 6 in        | 2.29 m      |
| Raise / lower speed            | 30 / 30 sec      | 30 / 30 sec | 30 / 30 sec      | 30 / 30 sec | 57 / 30 sec      | 57 / 30 sec |
| Controls                       | proportional     |             | proportional     |             | proportional     |             |
| Drive                          | dual front wheel |             | dual front wheel |             | dual front wheel |             |
| Multiple disc brakes           | dual rear wheel  |             | dual rear wheel  |             | dual rear wheel  |             |
| Tires - solid non-marking      | 15 x 5 in        | 38 x 13 cm  | 15 x 5 in        | 38 x 13 cm  | 15 x 5 in        | 38 x 13 cm  |

### Power


|                           |                                     |      |                                  |      |                                  |      |
|---------------------------|-------------------------------------|------|----------------------------------|------|----------------------------------|------|
| Power source              | 24 V DC (four 6 V 225 Ah batteries) |      | 24 V (four 6 V 225 Ah batteries) |      | 24 V (four 6 V 225 Ah batteries) |      |
| Hydraulic system capacity | 4.5 gal                             | 17 L | 4.5 gal                          | 17 L | 4.5 gal                          | 17 L |

### Weight\*\*\*\*

|          |           |          |           |          |           |          |
|----------|-----------|----------|-----------|----------|-----------|----------|
| ANSI/CSA | 3,977 lbs | 1,804 kg | 4,312 lbs | 1,956 kg | 5,211 lbs | 2,364 kg |
| CE/AUS   | 4,351 lbs | 1,974 kg | 5,395 lbs | 2,447 kg | 6,200 lbs | 2,812 kg |

### Standards Compliance

ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

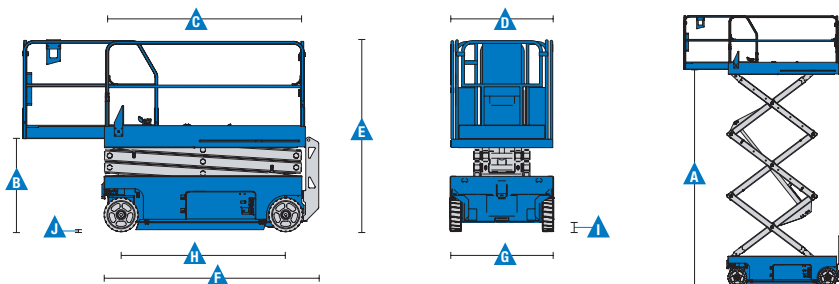

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

\*\* CE/AUS markets: Two person maximum occupancy on all models. GS-3246 outdoor maximum occupancy is one person.

\*\*\* Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.

\*\*\*\* Weight will vary depending on options and/or country standards.

### Features

#### Standard Features

##### Measurements

###### GS-2046

- 26 ft (8.10 m) working height
- Up to 1,200 lbs (545 kg) lift capacity

###### GS-2646

- 32 ft (9.92 m) working height
- Up to 1,000 lbs (454 kg) lift capacity

###### GS-3246

- 38 ft (11.75 m) working height
- Up to 700 lbs (318 kg) lift capacity

##### Productivity

- 89 x 45.3 in (2.26 x 1.15 m) steel platform
- 36 in (.91 m) extension deck
- Folding rails with full height swing gate
- Drive at full height
- Dual front wheel drive
- Universal 20 amp smart charger
- Rear recessed charger receptacle
- SmartLink™ - proportional lift and drive
- Platform control with battery charge indicator and diagnostic display
- On-board diagnostic system
- AC power to platform
- Lanyard attachment points
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Rear wheel multiple disc brakes
- Front wheel hydraulic dynamic braking
- Brake release
- Swing-out component trays
- Solid non-marking tires
- Pothole guards
- Tilt level sensor with audible alarm
- Descent alarm
- Electronic horn
- Hour meter

##### Power

- 24 V DC (four 6 V 225 Ah batteries)

#### Options & Accessories

##### Productivity Options

- Air line to platform
- Dual flashing beacons
- Motion alarm
- Automotive horn
- Biodegradable hydraulic fluid

##### Power Options

- Power inverter (120 V/60 Hz)
- EE rating
- AGM maintenance-free batteries



#### Genie United States

6464 185th Ave. NE  
Redmond, WA 98052  
Telephone +1 (425) 881-1800  
Toll Free in USA/Canada +1 (800)-536-1800  
Fax +1 (425) 883-3475

#### Distributed By: